

Glass Passivated Three Phase Rectifier Bridge


VRRM 1800V
ID 60A

Applications

- Three phase rectifiers for power supplies
- Rectifiers for DC motor field supplies
- Battery charger rectifiers
- Input rectifiers for variable frequency drives

Features

- Three phase bridge rectifier
- Blocking voltage:1800V
- Isolated heatsink using DBC technology
- Glass passivated chip
- UL recognized applied for file no. E230084

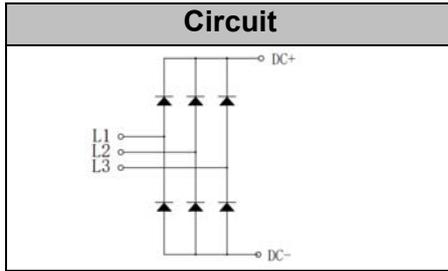

Module Type

TYPE	VRRM	VRSM
MD60S18N1	1800V	2000V

Maximum Ratings

Symbol	Conditions	Values	Units
I_D	Three phase, full wave $T_c=90^\circ\text{C}$	60	A
I_{FSM}	$t=10\text{mS}$ $T_{vj}=25^\circ\text{C}$	780	A
i^2t	$t=10\text{mS}$ $T_{vj}=25^\circ\text{C}$	3000	A^2s
V_{isol}	a.c.50HZ;r.m.s.;1min	2500	V
T_{vj}		-40 to +150	$^\circ\text{C}$
T_{stg}		-40 to +125	$^\circ\text{C}$
M_t	To terminals(M4)	$2\pm 15\%$	Nm
M_s	To heatsink(M4)	$2\pm 15\%$	Nm
Weight	Module (Approximately)	27	g

Thermal Characteristics

Symbol	Conditions	Values	Units
$R_{th(j-c)}$	Per Diode	0.97	$^\circ\text{C/W}$
$R_{th(j-c)}$	Per Module	0.17	$^\circ\text{C/W}$

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
VFM	$T=25^\circ\text{C}$ $I_F=60\text{A}$	—	1.15	1.45	V
IRD	$T_{vj}=25^\circ\text{C}$ $VRD=VRRM$ $T_{vj}=150^\circ\text{C}$ $VRD=VRRM$	—	—	0.3 5	mA mA



Performance Curves

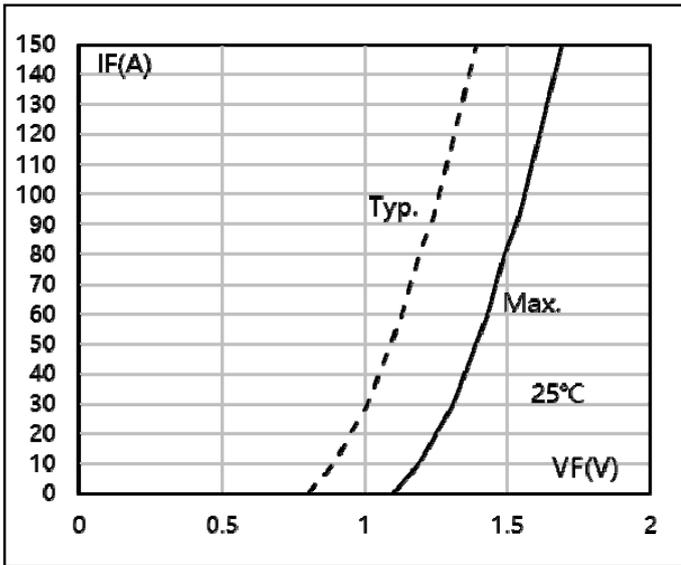


Fig1. Forward Characteristics

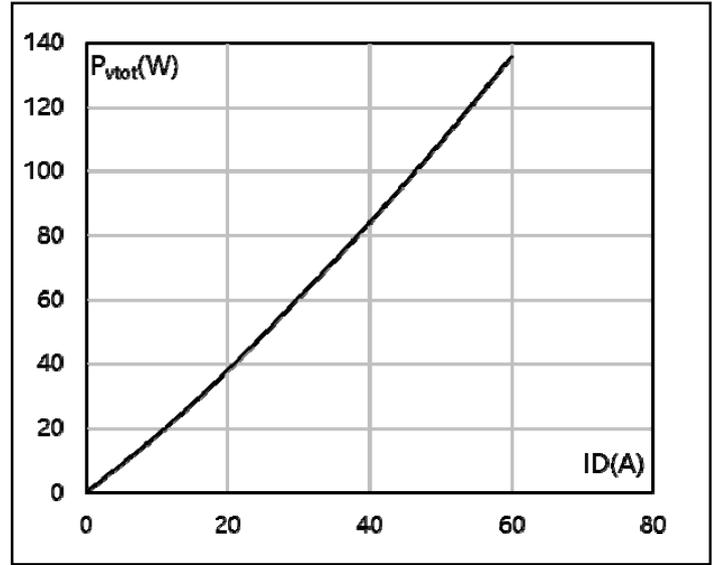


Fig2. Power dissipation

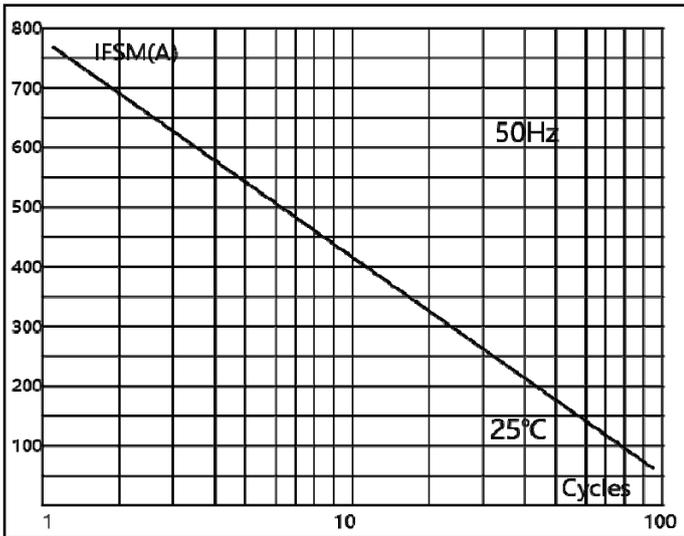


Fig3. Max Non-Repetitive Forward Surge Current

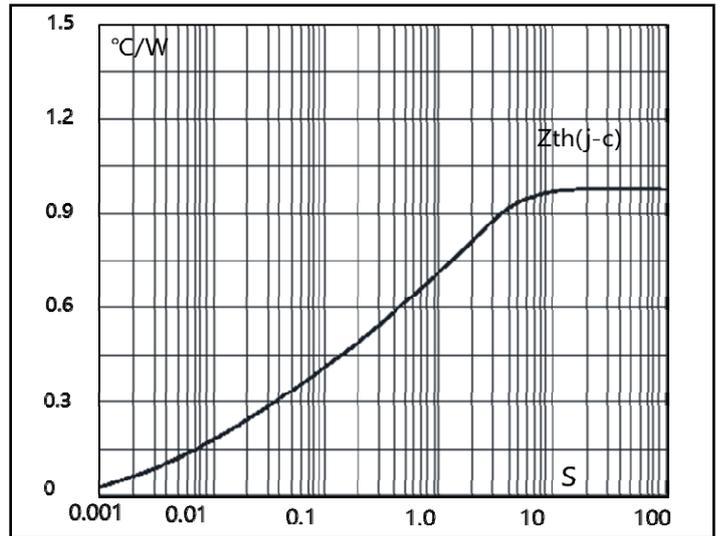


Fig4. Transient thermal impedance



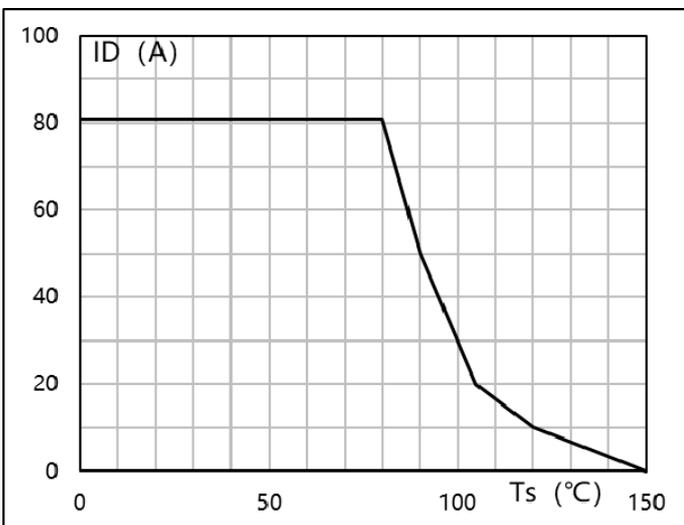




Fig5. Forward Current (DC Current)

Package Outline Information

CASE: N1

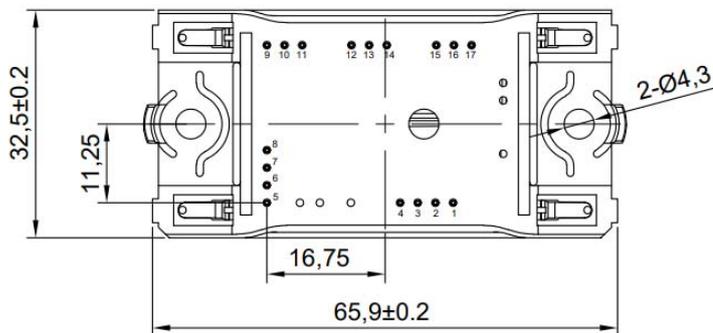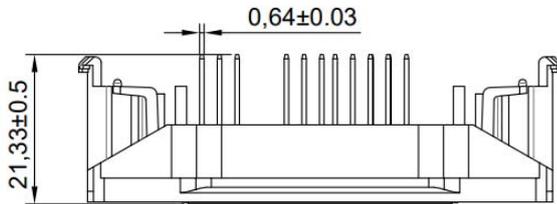

Pin	X	Y	Pin	X	Y
1	26.4	0	13	14.5	22.5
2	23.9	0	14	17	22.5
3	21.4	0	15	24	22.5
4	18.9	0	16	26.5	22.5
5	0	0	17	29	22.5
6	0	2.5			
7	0	5			
8	0	7.5			
9	0	22.5			
10	2.5	22.5			
11	5	22.5			
12	12	22.5			

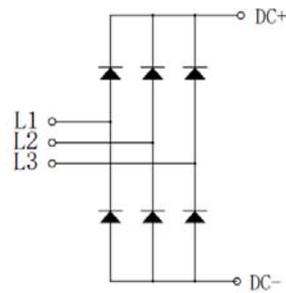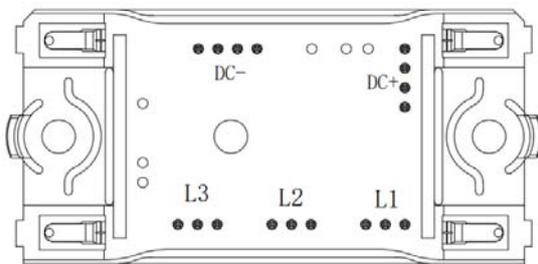

Dimensions in mm

Packing Standard

Item	Length: A (mm)	Width: B (mm)	Height: C (mm)	Quantity (PCS)
Item	385	272	27	24
Inner Box	395	280	260	240



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.