



## Low VF Bridge Rectifiers

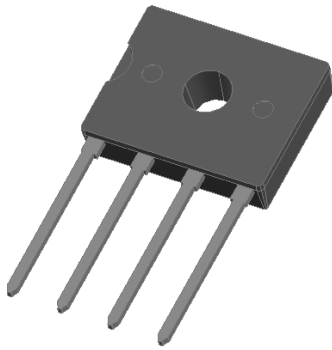

### Features

- UL recognition, file #E230084
- Glass passivated chip junction
- Low VF
- Ideal for printed circuit boards
- High surge current capability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

### Typical Applications

General purpose use in AC/DC bridge full wave rectification for monitor, TV, printer, power supply, switching mode power supply, adapter, audio equipment, and home appliances applications.

### Mechanical Data

- **Package:** D3K  
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

### ■Maximum Ratings (T<sub>a</sub>=25°C Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	D8UBL60
Device marking code				D8UBL60
Maximum Repetitive Peak Reverse Voltage		VRRM	V	600
Maximum RMS Voltage		VRMS	V	420
Maximum DC blocking Voltage		VDC	V	600
Average rectified output current @60Hz sine wave, R-load	With heatsink T <sub>C</sub> =130°C	IO	A	8.0
	Without heatsink T <sub>a</sub> =25°C			1.5
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, T <sub>j</sub> =25°C		IFSM	A	170
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, T <sub>j</sub> =25°C				340
Current squared time @1ms≤t≤8.3ms T <sub>j</sub> =25°C, Rating of per diode		I <sup>2</sup> t	A <sup>2</sup> s	120
Storage temperature		T <sub>stg</sub>	°C	-55 ~ +150
Junction temperature		T <sub>j</sub>	°C	-55 ~ +150
Dielectric strength @ Terminals to case, AC 1 minute		V <sub>dis</sub>	KV	2
Mounting torque @Recommend torque: 5kg·cm		Tor	kg·cm	8



## D8UBL60

### ■Electrical Characteristics (T<sub>a</sub>=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	D8UBL60
Maximum instantaneous forward voltage drop per diode	V <sub>F</sub>	V	IFM=4.0A	0.92
Maximum DC reverse current at rated DC blocking voltage per diode	I <sub>R</sub>	μA	T <sub>j</sub> =25°C	5
			T <sub>j</sub> =125°C	100
Typical junction capacitance	C <sub>j</sub>	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	58

### ■Thermal Characteristics (T<sub>a</sub>=25°C Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	D8UBL60
Thermal resistance	Between junction and ambient, Without heatsink	R <sub>θJ-A</sub>	°C/W	25
	Between junction and case, With heatsink	R <sub>θJ-C</sub>		1.5

Note: Device mounted on 75mm x 45mm x 5.5mm Aluminum Plate Heatsink.

### ■Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
D8UBL60	B1	Approximate 1.269	25	1500	6000	TUBE

### ■ Characteristics (Typical)

FIG1:I<sub>o</sub>-T<sub>c</sub> Curve

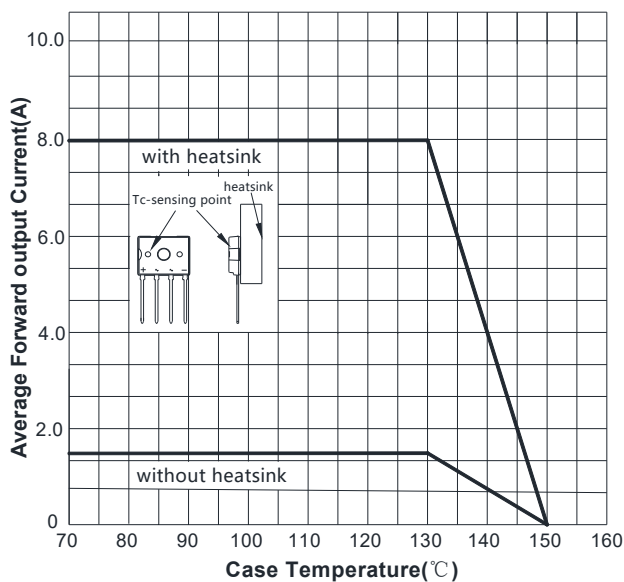


FIG2:Surge Forward Current Capability

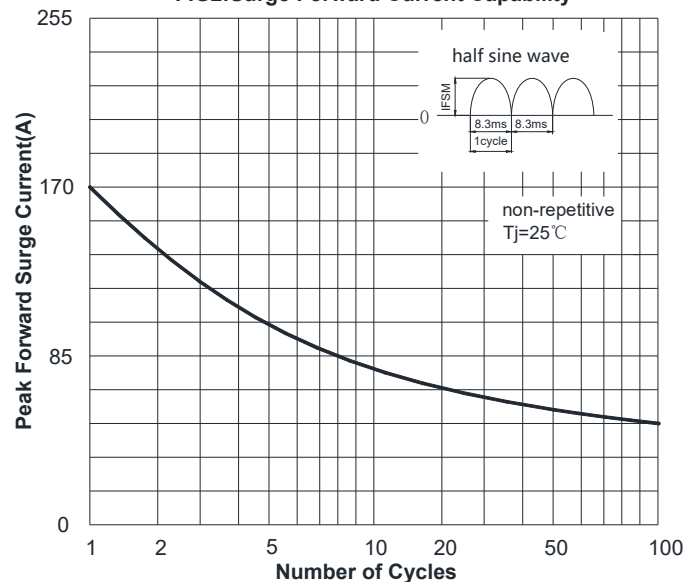


FIG3: Typical Forward Voltage



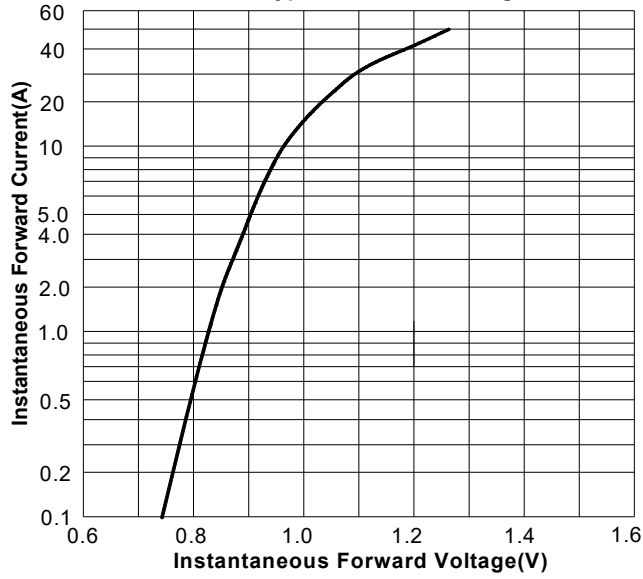


FIG4: Typical Reverse Characteristics

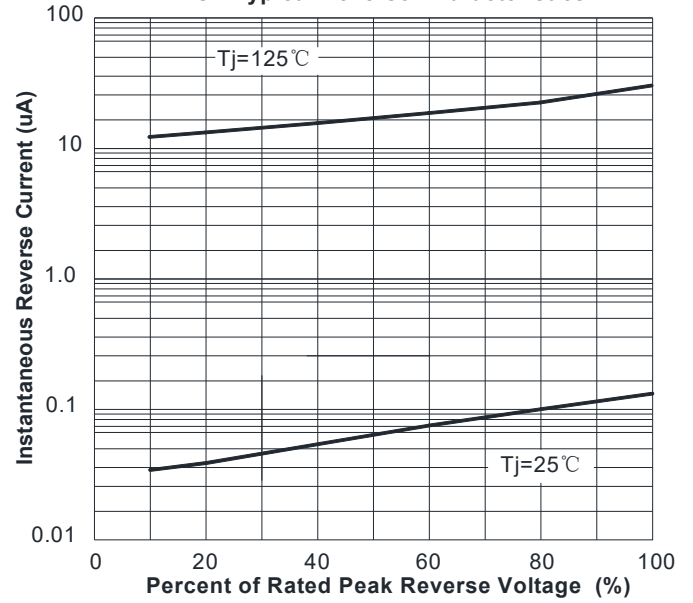

## ■ Outline Dimensions

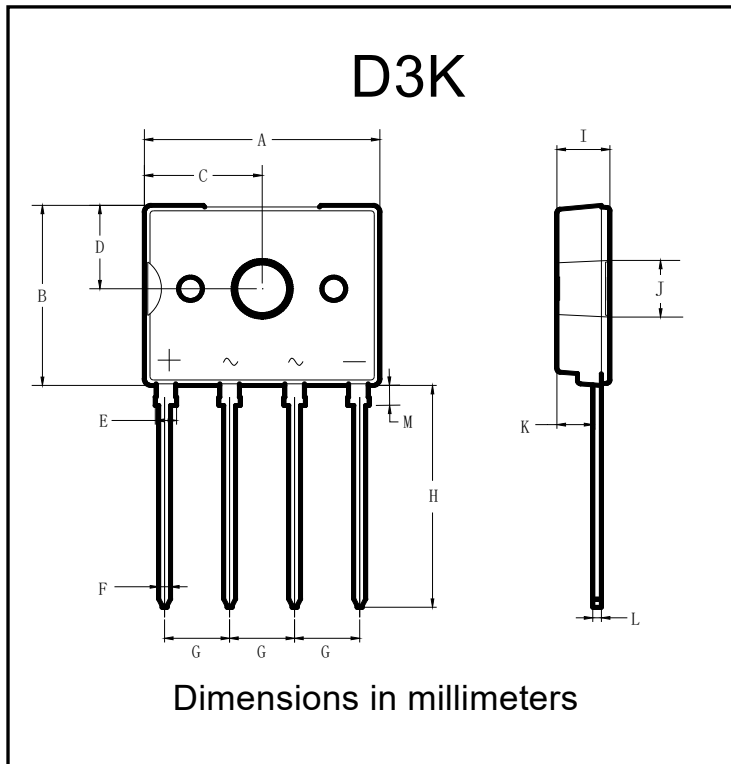

D3K		
Dim	Min	Max
A	13.30	14.30
B	10.30	11.30
C	6.40	7.40
D	4.50	5.50
E	1.05	1.45
F	0.60	0.85
G	3.70	3.90
H	13.10	13.50
I	2.60	3.60
J	3.10	3.40
K	2.00	2.20
L	0.40	0.60
M	0.90	1.50



### Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.