



Rectifier Diode Module

VRRM 1200 to 1800V
IFAV 810A


Applications

- Non-controllable rectifiers for AC/AC converters
- Line rectifiers for transistorized AC motor controllers
- Field supply for DC motors

Features

- International standard package
- High Surge Capability
- Simple Mounting

Circuit



Blocking Characteristics

TYPE			VRRM	VRSRM	Units
MD810C12GD6	MD810A12GD6	MD810K12GD6	1200V	1300V	V
MD810C14GD6	MD810A14GD6	MD810K14GD6	1400V	1500V	V
MD810C16GD6	MD810A16GD6	MD810K16GD6	1600V	1760V	V
MD810C18GD6	MD810A18GD6	MD810K18GD6	1800V	2000V	V

Maximum Ratings

Symbol	Conditions	Values	Units
IFAV	Single phase ,half wave 180° conduction Tc=85℃	810	A
IFSM	t=10ms Tvj=TvjM	19000	A
i ² t	t=10ms Tvj=TvjM	1805000	A ² s
V _{isol}	a.c.50HZ;r.m.s.;1min,I _{iso} :2mA(max)	2500	V
Tvj		-40 to 150	℃
T _{stg}		-40 to 125	℃
Mt	To terminals(M10)	12±15%	Nm
Ms	To heatsink(M6)	6±15%	Nm
Weight	Module (Approximately)	1550	g

Thermal Characteristics

Symbol	Conditions	Values	Units
R _{th(j-c)}	per diode	0.065	℃/W
R _{th(c-s)}	per diode	0.02	℃/W

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
V _{FM}	T=25℃ IF =2000A			1.25	V
I _{RRM}	Tvj=TvjM V=VRRM			30	mA
V _{FO}	Tvj=TvjM			0.71	V
r _F	Tvj=TvjM			0.26	mΩ

Performance Curves

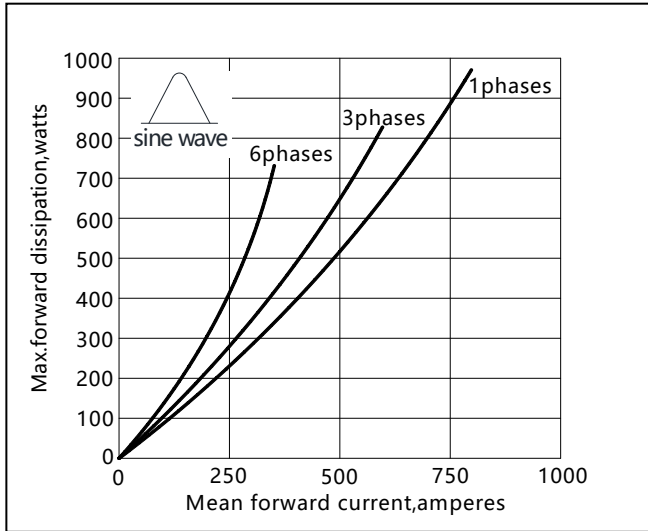


Fig1. Power dissipation

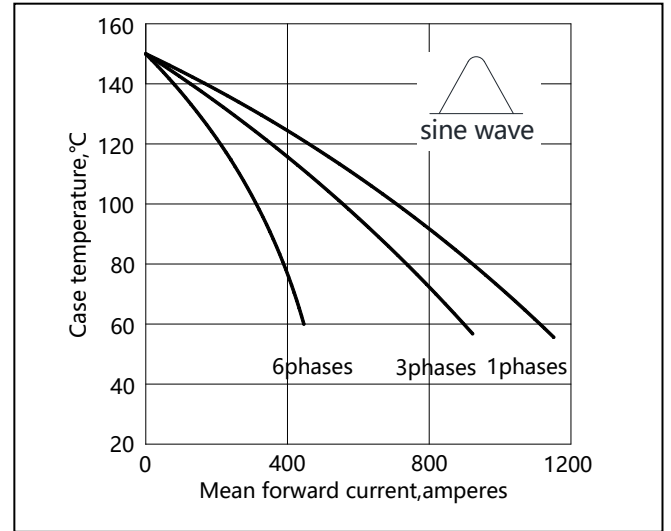


Fig2. Forward Current Derating Curve

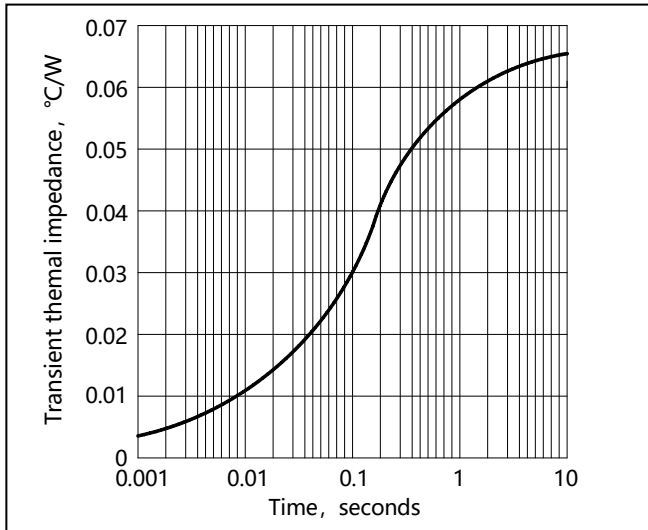


Fig3. Transient thermal impedance

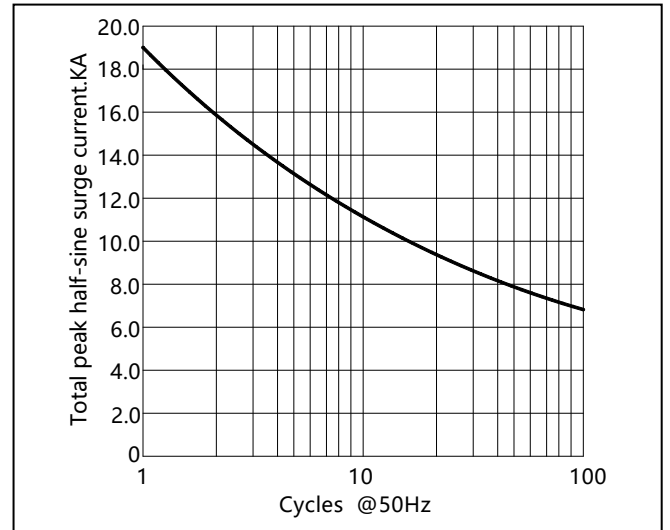


Fig4. Max Non-Repetitive Forward Surge Current

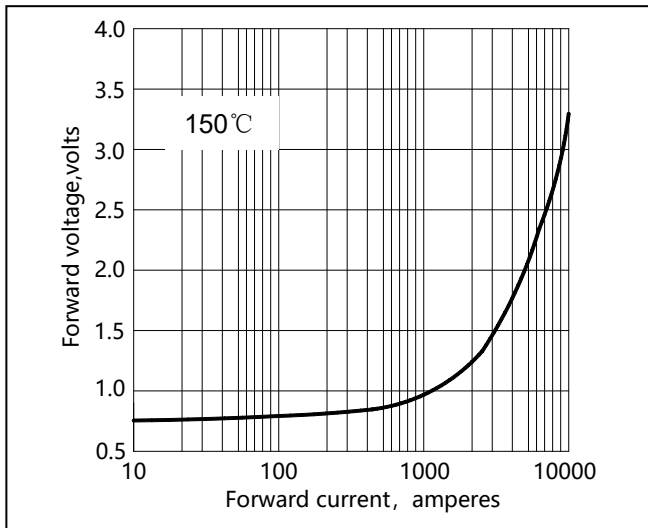



Fig5. Forward Characteristics



MD810C(A/K)-GD6

Package Outline Information

CASE: GD6

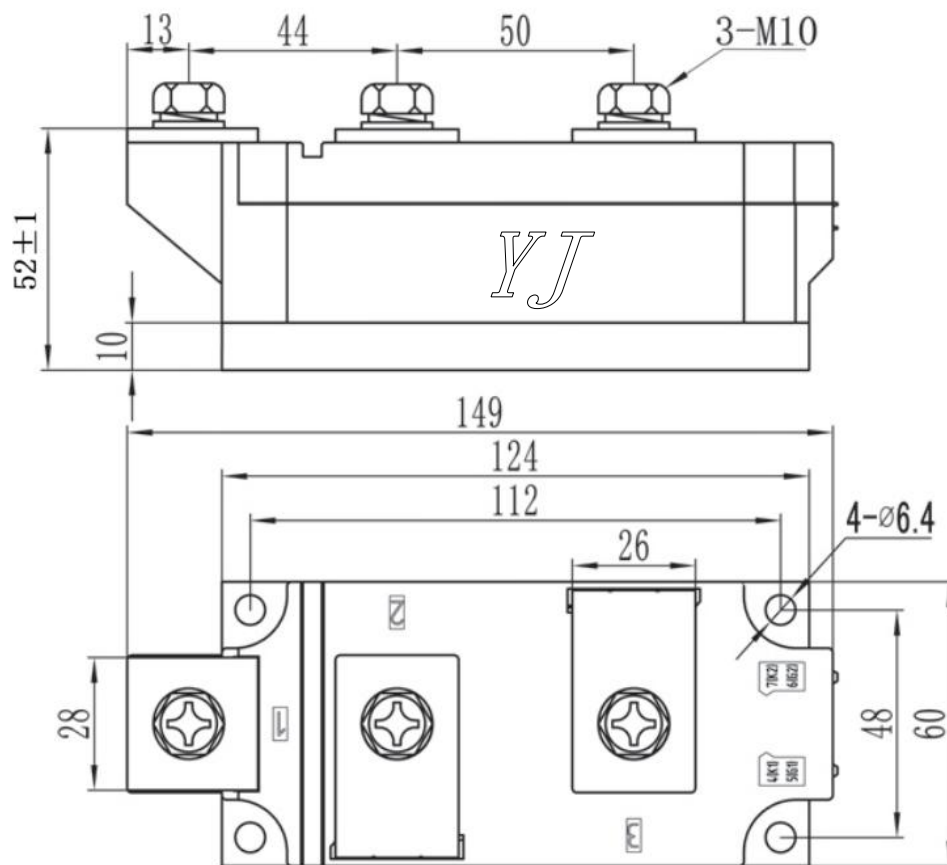

Dimensions in mm

Unmarked dimensional tolerance: $\pm 0.5\text{mm}$



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com>, or consult your nearest Yangjie's sales office for further assistance.