


NPN Digital Transistors (Built-in Resistors)

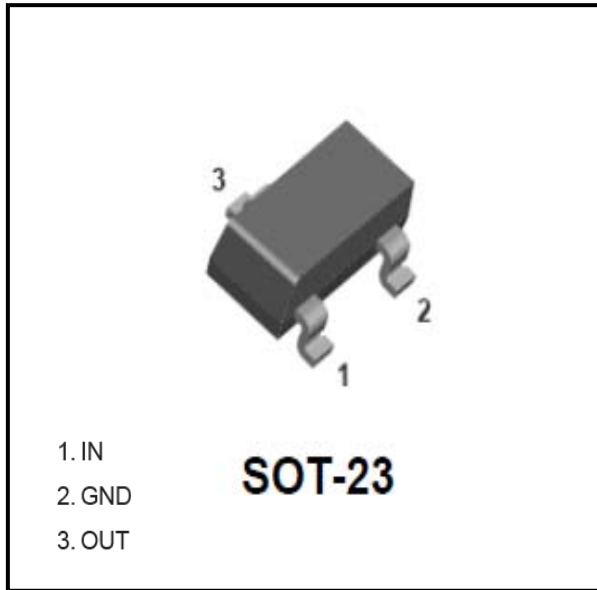


Features

- Epoxy meets UL-94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors
- Surface mount package ideally Suited for Automatic Insertion

Mechanical Data

- **Package:** SOT-23
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** N16

■Equivalent circuit

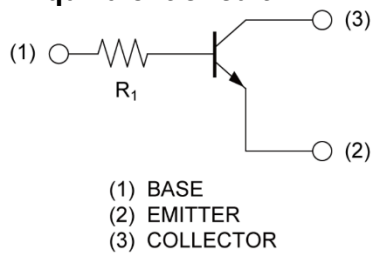

■Maximum Ratings (Ta=25°C Unless otherwise specified)

ITEM	SYMBOL	UNIT	CONDITIONS	VALUE
Collector-Emitter Voltage	V_{CEO}	V		50
Collector-Base Voltage	V_{CBO}	V		50
Emitter-Base Voltage	V_{EBO}	V		5
Collector Current	I_C	mA		100
Power Dissipation	P_D	mW		200
Junction Temperature	T_J	°C		-55 to +150
Storage Temperature	T_{STG}	°C		-55 to +150



DTC124TCA

■ Electrical Characteristics (Ta=25°C unless otherwise specified)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	$I_C=1mA$	50		
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	V	$I_C=1mA$	50		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	$I_E=50\mu A$	5		
Collector-base cut-off current	I_{CBO}	μA	$V_{CB}=50V$			0.5
Emitter-base cut-off current	I_{EBO}	μA	$V_{EB}=4V$			0.5
DC current gain	h_{FE}		$V_{CE}=5V, I_C=1mA$	100		600
Input resistance	R_1	k Ω		15.4	22	28.6
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	$I_C=5mA, I_B=0.5mA$			0.3
Transition frequency	f_T	MHz	$V_{CE}=10V, I_E=-5mA, f=100MHz$		250	

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
DTC124TCA	F2	Approximate 0.009	3000	30000	120000	7" reel

■ Thermal Characteristics (Typical)






PARAMETER	SYMBOL	UNIT	VALUE
Thermal resistance, junction-to-ambient	R_{thJA} (1)	°C/W	625
Thermal resistance, junction-to-case	R_{thJC} (1)	°C/W	500

Note:1.Device mounted on PCB, single-sided copper, with standard footprint.



DTC124TCA


■ Characteristics (Typical)

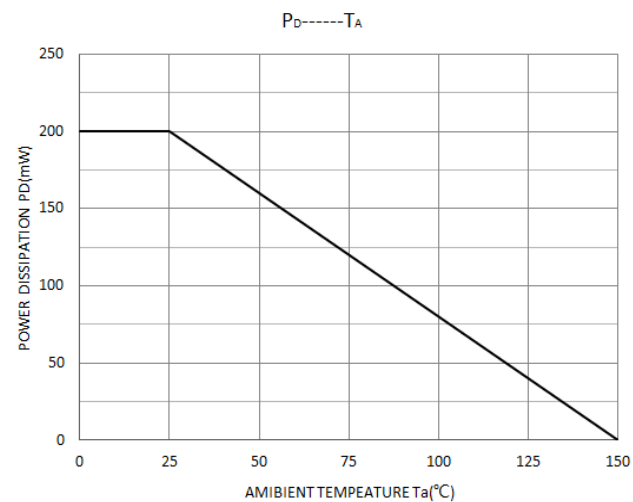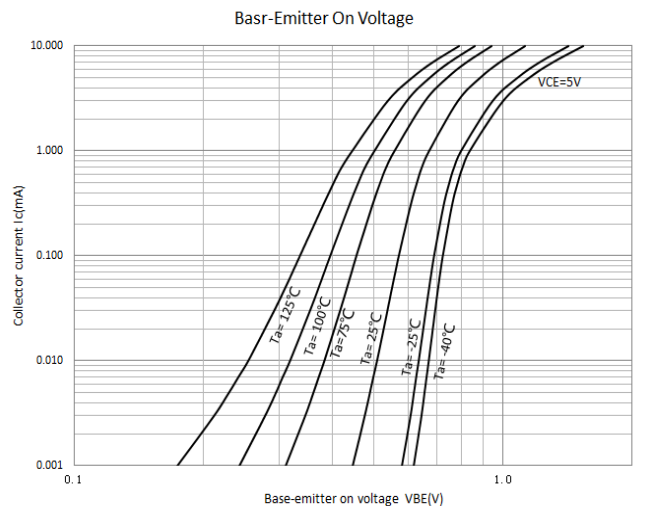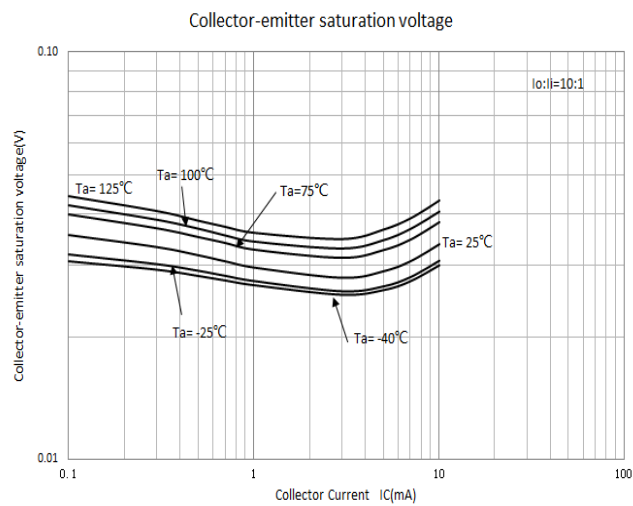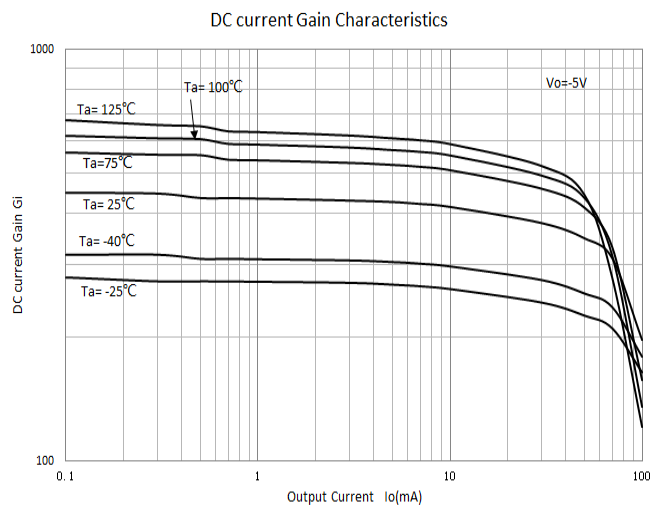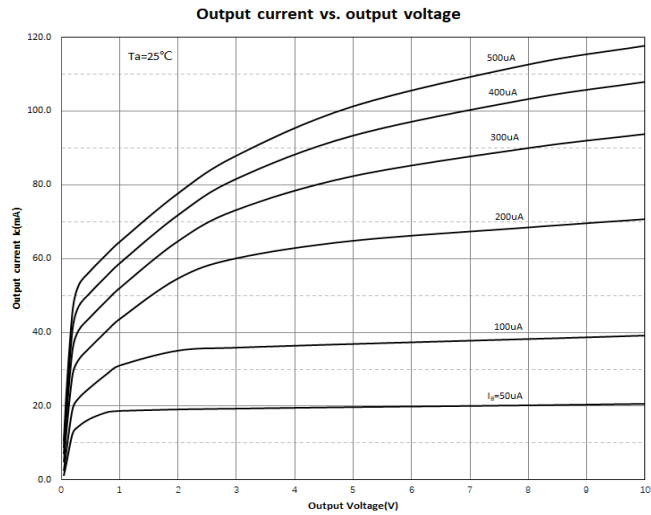




DTC124TCA

■SOT-23 Package Outline Dimensions

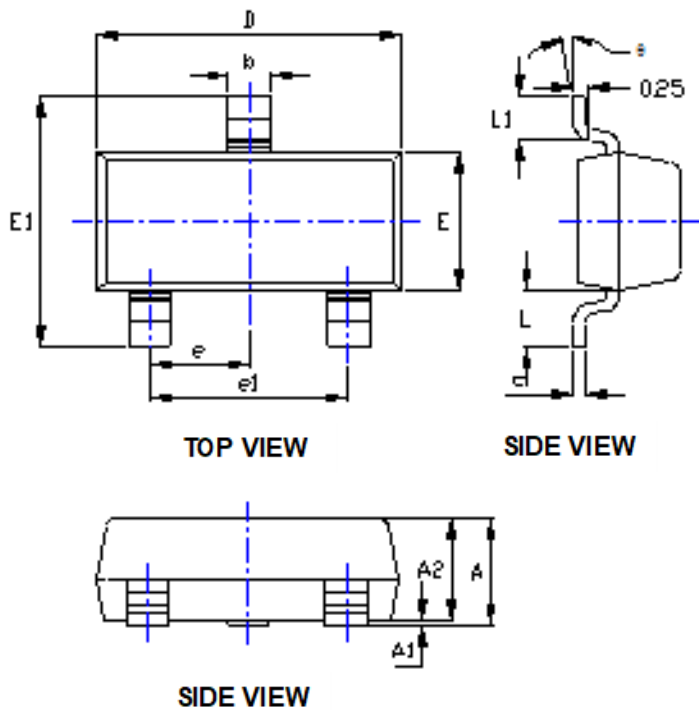

DIMENSIONS				
SYMBOL	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.045	0.900	1.150
A1	0.000	0.004	0.000	0.100
A2	0.035	0.041	0.900	1.050
b	0.012	0.020	0.300	0.500
c	0.004	0.008	0.100	0.200
D	0.110	0.118	2.800	3.000
E	0.047	0.055	1.200	1.400
E1	0.089	0.100	2.250	2.550
e	0.037TYP		0.950TYP	
e1	0.071	0.079	1.800	2.000
L	0.022REF		0.550REF	
L1	0.012	0.020	0.300	0.500
θ	0°	8°	0°	8°

■SOT-23Suggested Pad Layout

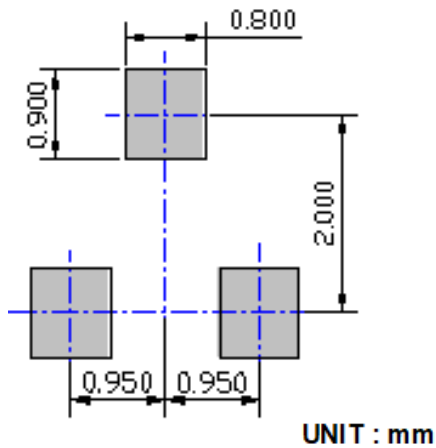



DTC124TCA

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.